

汽车继电器 Automotive Relay

10/20A

特性 / FEATURES

- 20A触点切换能力
Switching capability up to 20A
- 具有六种触点形式
Six different contact arrangements
- 印制电路板式引出端
Standard PCB layout


RoHS
Compliant

订购信息 / ORDERING INFORMATION

SLE-12VDC-S L-C



触点参数 / CONTACT PARAMETERS

触点形式	Contact arrangement	A / B / C / U / V / W
接触压降(10A下测量)	Voltage drop (at 10A)	≤200mV
触点材质	Contact material	银合金/Silver alloy: AgSnO ₂ In ₂ O ₃ 、AgSnO ₂ 、AgNi
触点负载	Contact rating	A, B, C: 10A/120VAC, 28VDC 20A/14VDC U, V, W: 2x10A/120VAC 28VDC 2x20A/14VDC
最大切换电压	Max switching voltage	75VDC 380VAC
最大切换电流	Max switching current	20A
电耐久性 (频率:每小时1800次)	Electrical endurance (Frequency:1800 ops/h)	1x10 ⁵ ops/1x10 ⁴ ops
机械耐久性 (频率:每小时18000次)	Mechanical endurance (Frequency:18000 ops/h)	1x10 ⁷ ops

特性参数 / CHARACTERISTICS PARAMETERS

绝缘等级	Insulation level		B/F
绝缘电阻	Insulation resistance		100MΩ(500VDC)
介质耐压 (漏电流 1mA)	Dielectric strength (Leakage current 1mA)	线圈与触点间 Between coil and contacts	1000VAC 1分钟/minute
		断开触点间 Between open contacts	500VAC 1分钟/minute
吸合时间(额定电压下)	Operate time(at nominal voltage)		≤10ms
释放时间(额定电压下)	Release time (without diode)(at nominal voltage)		≤5ms
湿度	Humidity		5% ~ 85% RH
环境温度(°C)	Ambient temperature		-40°C ~ +85°C/+105°C
抗冲击	Shock resistance		100m/s ² 11ms
抗振动(双振幅)	Vibration resistance (Double amplitude)		10Hz~55Hz 1.5mm
重量	Weight		约/Approx 12g
封装形式	Construction		密封/Sealed 防焊剂/Flux proofed

备注: 以上数据均为初始值

Remark: All above data is initial value

线圈参数 / COIL PARAMETERS

常温/At (23°C)


功耗(W)	Power consumption(W)	1.1W(L)						2.0W(D)					
		5	6	9	12	18	24	5	6	9	12	18	24
额定电压(VDC)	Nominal voltage(VDC)												
线圈电阻(Ω±10%)	Coil resistance(Ω±10%)	22.7	32.7	73.6	130.9	294.5	523.6	12.5	18	40.5	72	162	288
吸合电压(Max)	Pick-up voltage(Max)	75% 额定电压(Nominal voltage)											
释放电压(Min)	Drop-out voltage(Min)	10% 额定电压(Nominal voltage)											
允许最大电压(VDC)	Max allowable overdrive voltage(VDC)	130% 额定电压(Nominal voltage)											

安全认证(相关认证以第三方认证证书为准) / SAFETY APPROVAL RATINGS




外形图 / OUTLINE DIMENSIONS

单位/Unit(mm)

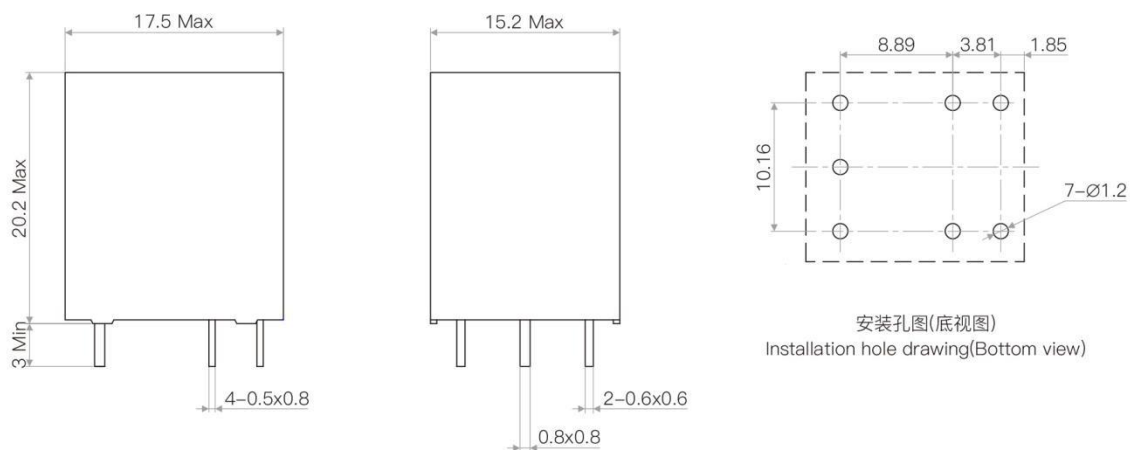


未注公差/Tolerance:±0.1


线路图(底视图) / WIRING DIAGRAM (BOTTOM VIEW)




转换C型/Conversion C type




常开A型/Normally open A type




常闭B型/Normally closed B type



转换W型/Conversion W type




常开U型/Normally open U type



常闭V型/Normally closed V type

性能曲线图 / CHARACTERISTIC CURVES

电耐久性曲线
Electrical endurance curve

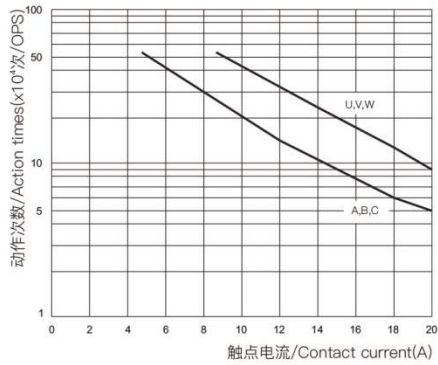

线圈温升
Coil temperature rise

